

Infinity B™ Power System

Dual Voltage, Universal Bulk Power System



Overview

The Lineage Power Infinity B™ DC energy system is a universal bulk power plant that supports dual voltage (+24V/-48V) operation through the use of a comprehensive range of state of the art rectifiers and DC-DC converters. Primary voltage is supported by rectifiers and battery reserve, while secondary voltage is supported by DC-DC converter modules. Primary voltage can be -48V or +24V. The bulk output panel is capable of connecting two 750 MCM and two 4/0 cables per polarity. Output can be routed top or bottom.

The Infinity B Power System has primary voltage capacity for +24V power up to 1,600A and -48V power up to 1,200A; secondary voltage capacity is up to 600A based on input capacity module.

Shelf / Bay Options

Infinity B systems may be equipped in a 7 ft 23" relay rack; a half height rack for mounting on battery stands; or mounting rails for field install applications. The compact size is as little as 6U (10.5") tall and 20.2" deep. Universal shelves are 1U tall with four slots that accept any Infinity series rectifier or converter.

- Dual Voltage power system with ultimate flexibility
- -48V up to 1,200A (65KW) or +24V up to 1,600A (44KW)
- Secondary voltage up to 600A
- High availability wireless telecom applications
- Telecom service providers
- Efficiency approaching 97%

Infinity Rectifier and Converter Family

The Infinity B offers DC rectifiers and converters for both +24V to -48V and -48V to +24V applications. Rectifiers and converters are color coded to quickly identify both the voltage and whether it is a rectifier or converter (orange for +24V and blue for -48V).

Rectifier and Converter Options:

- NE100AC24 Rectifier, 100A/24V Output
- NE050AC48 Rectifier, 50A/48V Output
- NE075DC24 Converter, 75A/24V Output
- NE030DC48 Converter, 30A/48V Output

Pulsar Plus Controller

The Infinity B utilizes the industry leading Pulsar Plus controller with Ethernet and SNMP communications to deliver extensive monitoring and control features with remote access. Optionally, the Galaxy Millennium II controller is available for central office deployments requiring advanced monitoring.

Benefits

Reliability

- Distributed fault tolerance
- Proven field performance
- Controller continuity

Intelligence

- Industry leading controller features
- Ethernet interface for remote access
- Centralized network management

Investment Protection

- Module Compatibility
- Power Shelf Growth
- Secondary Voltage flexibility
+24V / -48V
- Flexible Upgrade Options

On Time Delivery

- Standard building blocks
- 4 - 6 week availability
- 24/7 support

Total Efficiency

The Lineage Power Total Efficiency™ (TE) architecture reduces energy loss and lowers cooling costs by 50-70%. TE products will prioritize sustainable energy sources like solar, wind, water and fuel cells over traditional utility grid or diesel generator sources – and they will intelligently respond to smart grid information to reduce consumption during peak demand periods. Active Rectifier Management (ARM) and Battery Charging Optimization (BCO) features increase efficiency on current and legacy power infrastructures. The Total Efficiency architecture addresses issues end-to-end based on our proven experience and expertise in batteries, power distribution, DC energy systems, AC-DC power supplies, and DC-DC board mounted power to deliver a solution that is more safe, reliable and energy efficient than alternatives from our competitors.

Infinity Rectifiers and Converters



- **Compact** - 1RU form factor providing high power density (24 W/in³)
- **Dual Voltage compatibility** – the unique connector pin designation allows the rectifier to be used in a “universal” power shelf, alongside rectifiers or DC-DC converters with different output voltages.
- **Plug and Play** – installation of the rectifier in a shelf connected to a compatible system controller initializes all set up parameters automatically. No adjustments are needed.
- **Extended service life** – parallel operation with automatic load sharing ensures that parallel units are not unduly stressed even when a unit fails or is removed.
- **Monitoring / control** – the built in microprocessor controls and monitors all critical rectifier functions and communicates with the system controller using the built in Galaxy Protocol serial interface.
- **Fail safe performance** – hot insertion capabilities allow for rectifier replacement without system shutdown; soft start and inrush current protection prevent nuisance tripping of upstream breakers.

Applications

- Telecommunications networks
- Digital subscriber line (DSL)
- Indoor/outdoor wireless
- Routers/switches
- Fiber in the loop
- Transmission
- Data networks
- PBX


Key Features

- Extended temperature range
- Redundant fan cooling
- Front panel LED indicators
- 1U height, hi power density
- 220/110 V AC input
- Digital load sharing
- Hot pluggable
- RoHS compliant


Specifications

Input	NE100AC24	NE050AC48	NE030DC48	NE075DC24
Voltage Range - High-Line - Low-Line	175-275Vdc 85-140Vdc	175-275Vdc -	21-30Vdc - -	42-60Vdc - -
Input Current	14.9A @208Vdc 12.9A @240Vdc	14.5A @208Vdc 12.6A @240Vdc	63A @27Vdc 81A @21Vdc	41A @54.5Vdc 54A @42Vdc
Input Frequency	45 – 66Hz	45 – 66Hz	-	-
Power Factor	0.98 at>50% load	0.98 at>50% load	-	-
Efficiency	92%	93%	92%	93%
Total Harmonic Distortion	5% at full load	5% at full load	-	-
Output				
Voltage Adjust Range	21-29Vdc	42-58Vdc	46-57Vdc	23-28Vdc
Voltage Nominal	27.25V	54.5V	52.0V	27.2V
Regulation(with controller)	±0.5%	±0.5%	±0.5%	±0.5%
Ripple	100mV rms	100mV rms	100mV rms	100mV rms
Psophometric Noise	2 mV	2 mV	2 mV	2 mV
Output Current - High-Line - Low-Line	100A @27.25V 44A @27.25V	50A @54.5V -	30A @52.0V - -	75A @27.2V - -
Heat Dissipation @ max out	237W / 808 BTU/hr	205W / 699 BTU/hr	154W / 525 BTU/hr	202W / 689 BTU/hr

Environmental	
Operating Temperature	-40°C to +75°C (-40 to 167 °F)
Storage Temperature	-40°C to +85°C (-40 to 185 °F)
Power De-Rating	2% per °C from +65°C to +75°C
Relative Humidity	95% max, non-condensing
Altitude	2,000M max
Mechanical	
Length (in. /mm)	13.85 / 351.8
Width (in. /mm)	5.25 / 132.8
Height (in. /mm)	1.70 / 43.2
Weight (lb / Kg)	5.2 / 2.4
Safety and Standards Compliance	
NEBs	Evaluated by independent NRTL test lab to Telcordia GR63, Issue 3 and GR1089-CORE, Issue 5
Safety	CE mark to Low Voltage Directive 2006/95/EC and EMC Directive 2004/108/E (Rectifiers Only) UL 609501-1, 2nd Ed. Recognized CSA C22.2 No. 60950-1-03 Certified
RoHS	Compliant to RoHS EU Directive 2002/95/EC; RoHS 5/6
EMC	European Directive 2004/108/EC; EN55022, Class A; EN55024; FCC, Class A; GR1089-CORE, Issue 5

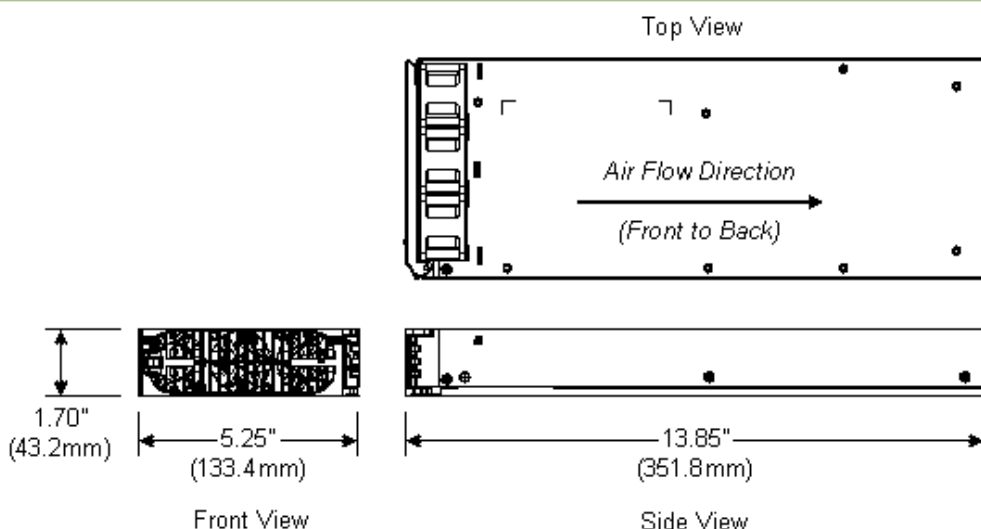Outline Drawing	
 The drawing shows three views of the power module: Top View: A rectangular view showing the top surface. It includes an arrow indicating "Air Flow Direction (Front to Back)". Front View: A rectangular view showing the front surface. It includes dimensions: 1.70" (43.2mm) for height and 5.25" (133.4mm) for width. Side View: A rectangular view showing the side profile. It includes a dimension: 13.85" (351.8mm) for length.	

Pulsar Plus Controller

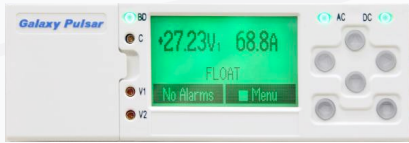

The Pulsar Plus family of controllers provides system monitoring and control features for Infinity, CP, and other power systems. These controllers monitor and control system components including rectifiers, converters, and distribution modules via a multi-drop RS485 digital communications bus. System status, parameters, settings, and alarm thresholds can be viewed and configured from the controller's front panel display. Assignment and configuration of alarm inputs and output relays can be performed from a laptop computer connected to a local RS-232 or Ethernet port, or by remote access is through a network connection

to the World Wide Web (internet) or your enterprise network (intranet). An optional modem is also available.

This controller utilizes standard network management protocols allowing for advanced network supervision. Lineage Power Galaxy Manager™ software is the centralized visibility and control component of a comprehensive power management system designed to meet engineering, operations and maintenance needs. The Galaxy Manager client-server architecture enables remote access to system controllers across the power network.

Applications

- Telecommunications networks
- Digital subscriber line (DSL)
- Indoor/outdoor wireless
- Routers/switches
- Fiber in the loop
- Transmission
- Data networks
- PBX

Key Features

Remote Access and Features

- Integrated 10/100Base-T Ethernet Network
 - TCP/IP
 - SNMP V2c for management
 - SMTP for email
 - Telnet for command line interface
 - DHCP for plug-n-play
 - FTP for rapid backup and upgrades
 - HTTP for standard web pages and browsers
 - Compatible with Galaxy Manager and other management packages
 - Shielded RJ-45 interface referenced to chassis ground
- Password protected security levels: User, Super-User, Administrator for all access
- Ground-referenced RS232 system port
- ANSI T1.317 command-line interface
- Modem access support
 - Remote via external modem
 - Callback security
- EasyView2, Windows-based GUI software for local terminal or Modem access

Standard System Features

- Monitor and control of more than 60 connected devices
 - Robust RS485 system bus
- Standard and user defined alarms
 - Alarm test
 - Assignable alarm severity: Critical, Major, Minor, Warning, and record-only
 - 10 alarm relays (7 user assigned)
- Rectifier management features
 - Automatic rectifier restart
 - Active Rectifier Management ARM (energy efficiency)
 - Remote rectifier (on/off)
 - Reserve Operation
 - Automatic rectifier sequence control
 - N + X redundancy check
- Multiple Low Voltage Load and Low Voltage Battery Disconnect thresholds
- Configuration, statistics, and history
 - All stored in non-volatile memory
 - Remote/local backup and restore of configuration data
- Industry standard defaults
 - Customer specific configurations available
- Remote/ local software upgrade
- Basic, busy hour, and trend statistics
- Detailed event history
- User defined events and derived channels

Standard Battery Management Features

- Float/boost mode control
 - Manual boost
 - Manual timed boost locally, T1.317, and remotely initiated
 - Auto boost terminated by time or current
- Battery discharge testing
 - Manual (local/remote)
 - Periodic
 - Plant Battery Test (PBT) input driven
 - Configurable threshold or 20% algorithm
 - Graphical discharge data
 - Rectifiers on-line during test
- Slope thermal compensation
 - High temperature
 - Low temperature
 - Step temperature
 - STC Enable/Disable, low temperature Enable/Disable
 - Configurable mV/°C slopes
- State of charge indication
- High temperature disconnect setting
- Reserve-time prediction
- Recharge current limit
- Emergency Power-Off input

Integrated Monitoring Inputs/Outputs

- System plant voltage (accuracy $\pm 0.04V$, resolution 0.01V)
- One system shunt (accuracy $\pm 0.5\%$ full scale, resolution 1A)
 - Battery or load
 - Mounted in the return side of DC bus
- Up to 15 binary inputs
 - Six inputs close/open to battery
 - 9 input close/open to return
 - User assignable
- Up to 7 Form-C output alarms (60VDC @ .5A)
 - User assignable
- 1-Wire[™] bus devices
 - Up to 16 temperature probes (QS873)
 - Up to 6 mid-string monitors (ES771)

Galaxy Manager Compatible

- Centralized web server and database with multiple user access to live or managed data with drill down to problem details
- Monitor and control of more than 40 connected devices
- Management information from polling or alarms received from alarm traps from multiple sites are available on one screen via the inter/intranet
- Trend user selected data over time
- Automatic or manual report generation
- Standard engineering tools like reserve time calculators and cable voltage drop analyzer

General	
Operating Voltage	± 24 Vdc, ± 48 Vdc (Range: ± 18 to ± 60 Vdc)
Input Power	Less than 7W
Operating Temperature Range	-40°C to +75°C (-40 to 167 °F)
Operating Relative Humidity	0 - 95% (non-condensing)
Storage Temperature Range	-40°C to +85°C (-40 to 185 °F)
Physical Specifications	Sizes vary by packaging option
Display	8-line by 40-character with alarm context sensitive backlit LCD

Safety and Standards Compliance	
NEBs	Evaluated by independent NRTL test lab to Telcordia GR63, Issue 3 and GR1089-CORE, Issue 5
Safety	CSA C22.2 No. 60950-1-03 Certified for Canada and U.S.; UL60950-1 1st Ed.
RoHS	Compliant to RoHS EU Directive 2002/95/EC RoHS 5/6
EMC	European Directive 2004/108/EC; EN55022, Class A; EN55024; FCC, Class A; GR1089-CORE, Issue 5

Agency Certifications	
NEB Level 3	Evaluated by independent NRTL test lab to Telcordia GR63, Issue 3 and GR1089-CORE, Issue 5
EMC	European Directive 2004/108/EC; EN55022 (CISPR22) Class A; EN55024 (CISPR24)
Safety	Underwriters Laboratories (UL) Listed per Subject Letter 1801: Power Distribution Center for Communications Equipment, and cUL Certified (CSA 22.2 950): Safety of Information Technology Equipment

Galaxy Millennium™ II Controller



Galaxy Millennium II is our flagship controller designed to meet the needs of the most advanced power systems. Building on the Galaxy Millennium platform, the Galaxy Millennium II delivers state-of-the art performance by combining sophisticated control, monitoring, and remote network access previously on three separate circuit packs into a single integrated unit. The controller has been designed to simplify plant administrative and surveillance routines as well as reduce operating, provisioning, and personnel expenses.

Configuration of the **Galaxy Millennium II** can be performed via menu based front panel display, a local terminal or remote modem using EasyView2, or through a local or remote network connection utilizing standard web browsers or network protocols. In addition to its standard integrated monitoring capabilities, this controller offers extensive external

monitoring using bay interface cards (BICs), distribution control cards, and remote peripheral monitoring modules (RPMs) designed for various inputs and transducers. Additional external relay contacts are also available.

The Galaxy Millennium II, with integrated network access, allows for advanced network supervision using standard network management protocols and available network management software. Lineage Power's Galaxy Manager network management software can be used to meet power system engineering, operations and maintenance needs. Via the World Wide Web, users gain access to live data and information logged into Galaxy Manager's centralized server from each monitored system controller across the power network.

Applications

- Infinity NE-M
- CPS6000-M2
- GPS 4848/100
- Galaxy Vector controller upgrades
- GPS 4812/24
- GPS 2424
- Stand-alone monitoring applications
- Galaxy Millennium upgrades & replacements

Key Features

Remote Access and Features

- Integrated 10/100Base-T Ethernet Network capability
 - TCP/IP
 - SNMP Version 2c for remote management
 - SMTP for email
 - Telnet for remote command line interface
 - TL-1
 - DHCP for network plug-n-play
 - FTP for rapid backup and upgrades
 - HTTP for standard and custom web pages for standard browsers
 - Compatible with Galaxy Manager and other standard network management packages
 - Standard shielded RJ-45 interface referenced to chassis ground
- Optional Dataswitch
 - Connections to 3 standard RS-232 devices for pass-through and alarm management
 - BSN extension to provide 3 additional RS-232 serial connections
- Configurable RS-232/485 port for remote via TL1/X.25
- EasyView2, Windows-based software, for configuration and reporting through local terminal or Modem connections
- Multiple password-protected security levels: User, Super-User, Administrator for all access

Standard System Features

- Monitoring and control of up to 85 RS485 serial connected devices
 - Maximum of 85 serial switchmode rectifiers
 - Maximum of 32 bay interface cards (BICs)
 - Maximum of 16 serial converters
- Standard and custom User Defined system alarms
 - Alarm cut-off
 - Alarm test
 - Multiple-level alarm severity: Critical, Major, Minor, Warning, and record-only
- Standard rectifier management features
 - Automatic rectifier restart
 - Reserve engine transfer
 - Adaptive Rectifier Management (ARM)/Energy Efficiency
 - Remote rectifier (on/off) control
 - Automatic rectifier sequence control
 - N + X redundancy check
- Low Voltage Load and Low Voltage Battery Disconnect Options (3)
- Various levels of configuration, statistics, and history
 - All stored in non-volatile memory
 - Remote and local backup and restore of configuration data
- Remote and local software upgrade
- Basic, busy hour, and trend statistics kept
- Detailed history kept
- Maintenance reminders
- Inventory management

- User defined events and derived channels
- Hardware DIP switch access control

Standard Battery Management Features

- Float/boost mode control
 - Manual front panel boost
 - Manual timed boost locally, T1.317, and remotely initiated
 - External timed boost
 - Battery thermal protect module (BTP)
 - Auto boost terminated by time or current
- Battery discharge testing
 - Manual
 - Periodic
 - Plant Battery Test (PBT) input driven
- Slope thermal compensation
 - High temperature compensation
 - Low temperature compensation
 - Step temperature
 - STC Enable/Disable, low temperature Enable/Disable
 - mV/°C adjustments
- High temperature disconnect/step setting
- Sophisticated reserve-time prediction
 - User configurable system reserve low alarm during normal operation
 - User configurable reserve time low alarm
- Recharge current limit
- Integrated "At Rate Calculator" for estimation purposes
- Battery discharge trace data
- Emergency Power-Off Input
- Lithium battery fail input

Features

Integrated Outputs

- Traditional office alarm interface with 19 Form-C alarm outputs (60VDC @.3A)
 - Standard default assignments: Power Critical-Audio, Power Critical-Visual, Power Critical-External, Power Major-Audio, Power Major-Visual, Power Major-External, Power Minor-Audio, Power Minor-Visual, Power Minor-External, Major Fuse (MJF), Minor Fuse (MNF), Battery On Discharge (BD), AC Fail (ACF), Rectifier Fail, High Voltage (HV), Very Low Voltage (VLV), Controller Fail, User Relay 1, User Relay 2
 - 16 Form-Cs are user assignable
- 1 1/3A Auxiliary Battery Supply (ABS) Output

Remote Peripheral Monitoring & Control

- Modular monitor and control growth options for up to 95 monitoring modules optimized for DC voltage and shunt monitoring, binary input detection, temperature monitoring, external transducer monitoring
- Additional Form-C relay output control available
- Devices managed and powered by the controller via one twisted-pair cable over distances of 300m or more
- Daisy-chain connections from module to module reduce installation costs and cable congestion
- Modules can be located near monitored source
- Various panels for rack-mounting available

Enhanced Battery Management Features

- Battery discharge test options including periodic and manual tests (local/ remote) with configurable thresholds or 20% discharge algorithm
- State of charge indication
- Rectifiers on-line during test (minimize risk to service)
- Discharge data stored in non-volatile memory. Graphical data available

Specification

General	
Operating Voltage	± 24Vdc, ± 48Vdc (Range: ± 18 to ± 60Vdc)
Input Power	36W (depending on options)
Operating Temperature Range	-40°C to +75°C (-40 to 167°F)
Storage Temperature Range	-40°C to +85°C (-40 to 185°F)
Operating Relative Humidity	0 - 95% (non-condensing)
Physical Specifications	9.24" H x 20.76" W x 2.14" D
Display	8-line by 40-character backlit LCD

- Accurate battery reserve time calculations that factor in battery specific parameters, plant voltage, load, temperature, number of battery strings and number of cells per string
- Thermal compensation (STC) and recharge current limit to maximize battery life

Extensive Plant and Monitoring Statistics

- Real-time data and historical statistics help analyze critical performance parameters
- Statistics for planning preventive or corrective maintenance before serious problems occur

Derived Channels

- 32 derived channels enable arithmetic and Boolean operations to be performed on measured values to allow customer specific parameters such as output power to be calculated and managed

Rectifier Management

- Energy Efficiency, provides ability to automatically shutdown selected rectifiers during low plant loads maintaining maximum battery plant efficiency without sacrificing reliability
- Provides Reserve Operation feature for maintaining designated number of rectifiers on during Engine runs as well as proper sequencing for generators
- Provides ability to transfer rectifiers (TR1-TR4) on in certain sequences for return of AC

Galaxy Manager Compatible

- Centralized web server and database with multiple user access to live or managed data with drill down to problem details
- Monitor and control of more than 40 connected devices
- Management information from polling or alarms received from alarm traps from multiple sites are available on one screen via the inter/intranet
- Trend user selected data over time
- Automatic or manual report generation
- Standard engineering tools like reserve time calculators and cable voltage drop analyzer

Agency Certifications	
NEBs	Evaluated by independent NRTL test lab to Telcordia GR63, Issue 3 and GR1089-CORE, Issue 5 (including level 3 testing)
EMC (Emissions)	FCC and EN 55022, Class B; FCC, Class B; GR1089-CORE, Issue 5
Safety	UL Unlisted Component as Part of GPS Power System


AC Input

Lineage Power Rectifier (A)	Model Number of Rectifier	Rated Input Voltage	Numbers of Rectifiers per AC feed	Nominal AC Current (A)	Minimum Circuit Breaker value recommended (A)*	75 C Minimum Recommended Wire Gauge (AWG)*
100A	NE100AC24	200	1	15.2	20	14
		200	2	30.4	40	10
50A	NE050AC48	200	1	14.9	20	14
		200	2	29.8	40	10

Specifications

Input	Min	Typ	Max	
Voltage Range - High-Line - Low-Line	175Vac 85Vac	220Vac 110Vac	275Vac 140Vac	Only available in 24V Rectifiers
Frequency	45Hz	60Hz	66Hz	
Power Factor	98%	99.5%		
Efficiency		Approaching 97%		
Total Harmonic Distortion			5%	
Primary Output				
Nominal Voltage	24Vdc		-48Vdc	
Output Current	1,600A Single Voltage 1,200A Dual Voltage		1,200A Single Voltage 900A Dual Voltage	
Vo Setpoint (factory)	27.2Vdc±1%		-54.5Vdc±1%	
Vo Range	+21Vdc to +29Vdc		-42Vdc to -58Vdc	
Regulation	±0.5%			
Secondary Output				
Nominal Voltage	-48Vdc		24Vdc	
Output Current	120A		300A	
Vo Setpoint (factory)	-54.5Vdc±1%		27.2Vdc±1%	
Vo Range	-42Vdc to -58Vdc		+21Vdc to +29Vdc	
Regulation	±0.5%			
Mechanical				
Height (in. /mm)	10.5 inches / 266mm			
Width (in. /mm)	23 inches / 584mm			
Depth (in. /mm)	20.2 inches / 514mm			
Weight (lb / Kg)	56lbs / 25.4kg			

Environmental	
Operating Temperature	-40°C to +45°C (-40 to 113 °F)
Storage Temperature	-40°C to +85°C (-40 to 185 °F)
Relative Humidity	95% max, non-condensing
Altitude	2,000M max
Safety and Standards Compliance	
NEBs	Evaluated by independent NRTL test lab to Telcordia GR63, Issue 3 and GR1089-CORE, Issue 5
Safety	CSA C22.2 No. 60950-1-03 Certified for Canada and U.S.; UL60950-1 1st Ed.
RoHS	Compliant to RoHS EU Directive 2002/95/EC RoHS 5/6
EMC	European Directive 2004/108/EC; EN55022, Class A; EN55024; FCC, Class A; GR1089-CORE, Issue 5
Agency Certifications	
CSA	CSA C22.2 No 60950-1-03 and UL 60950-1 1st Ed
EMI/EMC	European Directive 2004/108/EC; EN55022 (CISPR22) Class A; EN55024 (CISPR24)
NEBS LEVEL 3	GR1089-CORE, Issue 5

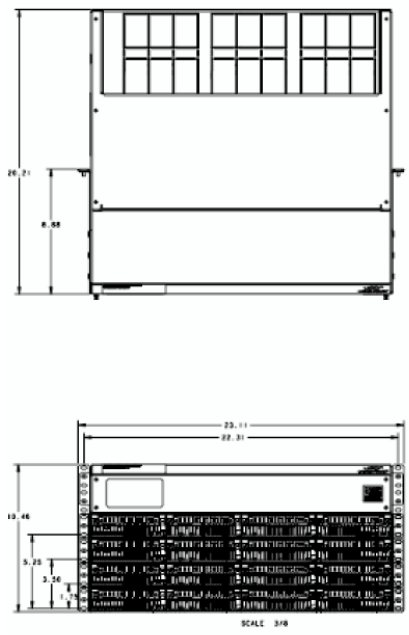Outline Drawing
 SCALE: 3/4"

Ordering Information – Infinity B™

The Infinity B is a universal bulk power plant that can be configured as a +24V or -48V single voltage power system or as a “dual voltage” power system that supports rectifiers and converters. The primary voltage is supported by +24V or -48V rectifiers and battery reserve, while secondary voltage is supported by dc/dc converters. The primary voltage can be up to 1,600A for +24V power or 1,200A for -48V power; secondary voltage capacity is up to 600A based on input capacity module.


Infinity B systems may be equipped in a 7 ft 23" relay rack; a half rack for mounting on battery stands; or mounting rails for field install applications. The compact size is as little as 6U (10.5") tall and 20.2" deep. Universal shelves are 1U tall with four slots that accept any Infinity series rectifier or converter.

Key Features

- Infinity Series Rectifiers for +24V and -48V applications.
- Dual Voltage power system with ultimate flexibility
- -48V up to 1,200A (65KW) or +24V up to 1,600A (44KW)
- Secondary voltage up to 600A
- High availability wireless telecom applications
- Telecom service providers
- Efficiency approaching 97%



Step 1: Select the Base Power System

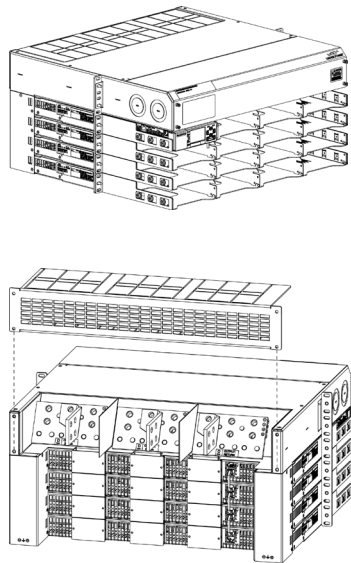Universal Bulk Output				
Output	Ordering Code	Model	Frame	Picture
+24V 24V 1,600A	CC109160124	Infinity B System with 4 power shelves, each shelf is equipped with 4 universal rectifier/converter slots. Equipped with input / output connection panel that includes bulk output connections for -48V, RTN, and +24V as well as AC input terminal panel. Suitable for frame or cabinet mounting (not included)	No Frame	
+24V -48V 24V, 1200A 48V, 120A		Shipped with: - Two output expansion busbars; expands one connection into 2 back to back connections capable of connecting two 750kCML cables. - AC terminal jumpers for connecting 2 rectifiers to a single AC feed.		
-48V 48V 1,200A				
-48V +24V 48V 900A 24V 300A				
			System Width 23"	

Step 2: Select Mounting Frame


Systems above are configured WITHOUT a mounting frame to facilitate use in cabinets or existing frames. The following frame options are available for the system.

Ordering Code	Description
CC848828938	7ft high relay rack for mounting 23" wide equipment

Step 3: Select Alarm Cables

Alarm Cables		
Ordering Code	Model	Photo
CC848817651	50ft Auxiliary input alarm cable for Pulsar Plus Controller	
CC848817668	150ft Auxiliary input alarm cable for Pulsar Plus Controller	
CC109157442	15ft alarm cable for Pulsar Plus Controller	
CC848817635	50ft alarm cable for Pulsar Plus Controller	
CC848817643	150ft alarm cable for Pulsar Plus Controller	

Step 4: Select Controller Options

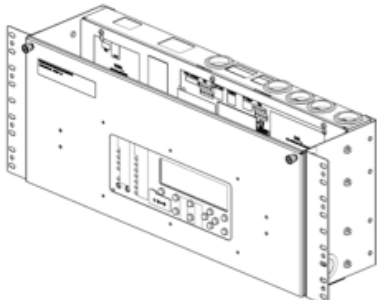System Controller			
Output	Ordering Code	Model	Picture
	CC109128402	Standard Infinity Pulsar Plus Slot Controller	
		NE843A	
	CC109132024	Millennium II Controller in a rack mount configuration (for switch mode rectifiers only)	

Step 5: Select Rectifiers and Converters


Rectifiers			
	Ordering Code	Model	Photo
	CC109138302	95-150Vac input, 24V, 45A output 175-275Vac input, 24V, 100A output	
100A	CC109160834	NE100AC24TEZ available Q1 2011	
	CC109124913	175-275Vac input, 48V, 50A output	
50A	CC109158878	NE050AC48TEZ Available Q2 2011	

Converters			
	Ordering Code	Model	Photo
	CC109112471	21-29 Vdc input, 48V, 30A output	
30A		NE030DC48	
	CC109142881	42-58 Vdc input, 24V, 75A output	
75A		NE075DC24	

Step 6: Select Remote Peripheral Monitoring Options (Millennium 2 Controller only)

Ordering #	Description			Photo
	Modules	# Inputs	# Temp	
108469461	J85501G1L21 RPM Shunt Monitoring (221F)	6	1	
108469479	J85501G1L22 RPM Voltage 0-200VDC (221D)	6	1	
108469495	J85501G1L23 RPM Transducers (221J)	6	1	
108298431	J85501G1L24 RPM Voltage 0-3VDC (221A)	6	1	
108298498	J85501G1L25 RPM Voltage 0-16VDC (221B)	6	1	
108469503	J85501G1L26 RPM Voltage 0-70VDC (221C)	6	1	
108298449	J85501G1L27 RPM Binary (222A)	6	1	
108483538	J85501G1L28 RPM Temperature (223T)	0	7	
108298456	J85501G1L9 RPM Control Relay (214A)	3	0	
Supporting Material				
407377704	Connecting Cable for RPMs (Order by foot)			
848535332	Panel for mounting 6 modules on the top of a GPS cabinet			
848412367	White panel for mounting 6 modules in a 23-inch frame			
847307410	12' Cable to be used with Temperature Probes			
847917879	½" Diameter Ring Terminal Temperature Probe (Cable Required)			
848528881	5/16" Diameter Ring Terminal Temperature Probe (Cable Required)			
405298308	Termination Resistor (1 per bus)			
406712968	Ferrite Bead (1 per bus)			
403607955	Monitor Channel cable KS13385 22AWG stranded pair, R&Bk (order by the foot)			

Millennium Remote Monitoring

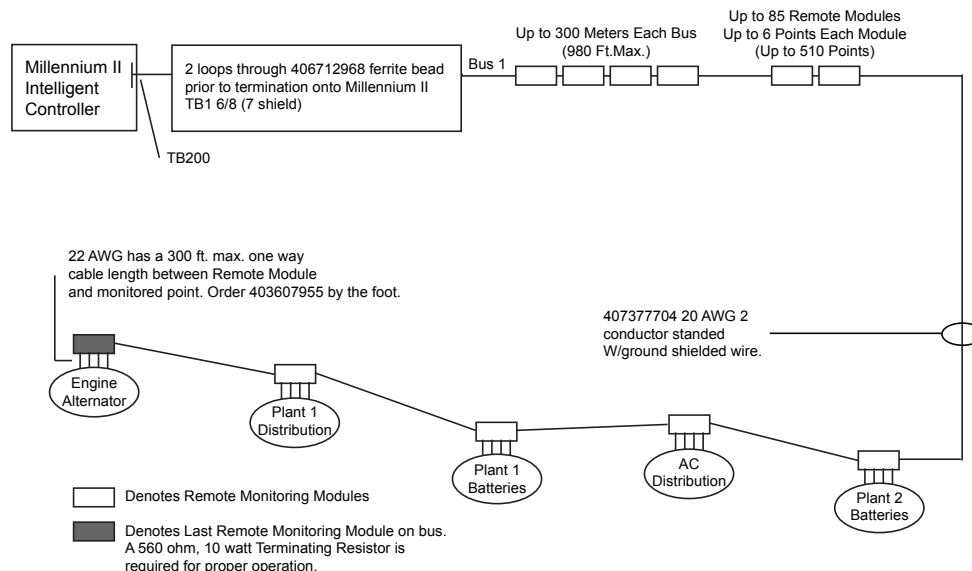

Step 7: Select Optional AC Monitoring Equipment (Millennium 2 Controller only)

AC Monitoring Options		
Ordering Code	Description	Photo
Configured Panels		
CC408646005	3P/3W 208/240V Line to Line, 10x12x14 box provides current, voltage, and power	
CC408646046	3P/3W 480V Line to Line, 10x12x14 box provides current, voltage, and power	
CC408646054	3P/4W 208V Line to Neutral, 10x12x14 box provides current, voltage, and power	
Transducers		
CC408645808	1-phase AC Current Transducer (Built-in CT; 150A max current; 350 kcmil max conductor size)	
CC408645816	1-phase AC Voltage Transducer 120V	
CC408645824	1-phase AC Voltage Transducer 208/240V	
CC408644537	3-phase AC Voltage Transducer 208/240V Line to Line	
CC408645741	3-phase AC Voltage Transducer 208/240V Line to Neutral (120V)	
CC408645832	3-phase AC Voltage Transducer 480V Line to Line	
CC408645840	3-phase AC Current Transducer	
Current Transformers (Required for configured panels and current transducers)		
CC408645857	Current Transformer, 200A primary, 5A secondary, 4 in inside diameter	
408524862	Current Transformer, 400A primary, 5A secondary, 4 in inside diameter	
CC408645865	Current Transformer, 600A primary, 5A secondary, 6 in inside diameter	
CC408645873	Current Transformer, 800A primary, 5A secondary, 6 in inside diameter	
CC408645881	Current Transformer, 1000A primary, 5A secondary, 8 in inside diameter	
CC408645898	Current Transformer, 1200A primary, 5A secondary, 8 in inside diameter	
Miscellaneous		
CC408645907	Barrier terminal block to extend the CT secondary leads beyond their 12 ft factory length. Use 12 AWG THHN wire in conduit.	
CC408645915	Bud Industries Wall Box (12H x 10W x 8D) w/captive screw cover & internal mounting panel. For mounting transducers	


Step 8: Select Distribution Components

Terminal Lugs for Battery and Large Breakers (3/8" bolt on 1" centers)				
Ordering Code	STR Wire GA (Class B)	Flex Wire GA (Class I)	WP-91412 List	Photo
406338665	2	-	-	
405348228	1/0	-	-	
405347236	2/0	1/0	-	
406021725	-	2/0	-	
405348251	4/0	-	-	
405347923	-	4/0	-	
407890763	350	-	-	
407890748	-	350	-	
406335141	750	-	-	
407890730	-	750	-	


Step 9: Select Battery Monitoring

Ordering Code	Description	Photo
CC109142980	QS873A Thermal Probe (A)	
CC848817024	10 ft wire set (B: thermal probe to controller)	
CC848822560	1 ft wire set (C: thermal probe to thermal probe)	
848719803	5 ft wire set (C: thermal probe to thermal probe)	
CC848822321	10 ft wire set (C: thermal probe to thermal probe)	
108958422	ES771A Battery Voltage Monitor Card	
CC848791517	2-1/2 ft wire set (D: ES771A to thermal probe)	
CC848797290	6 ft wire set (D: ES771A to thermal probe)	
848719829	10 ft wire set (D: ES771A to thermal probe)	
CC848791500	4 ft wire set (G: ES771A to ES771A or controller)	
848652947	10 ft wire set (G: ES771A to ES771A or controller)	
555052-1	In-Line Coupler (for extending item G above)	

Temperature/Voltage probes are needed for battery monitoring. They are connected to each battery or battery string to provide slope thermal compensation, temperature alarms and voltage imbalance alarms.

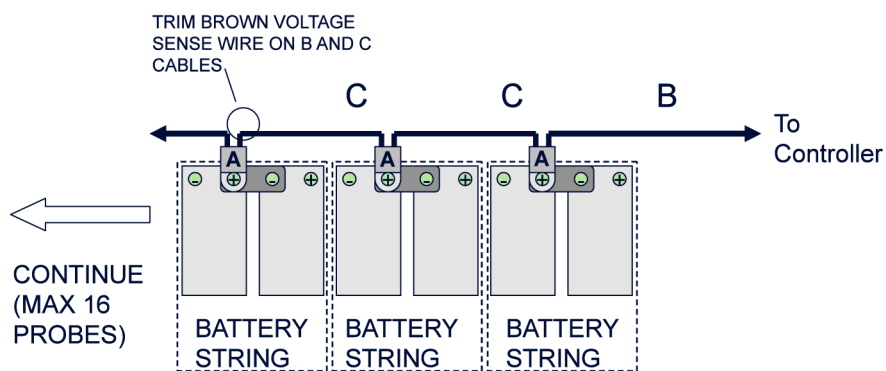

Temperature Measurement

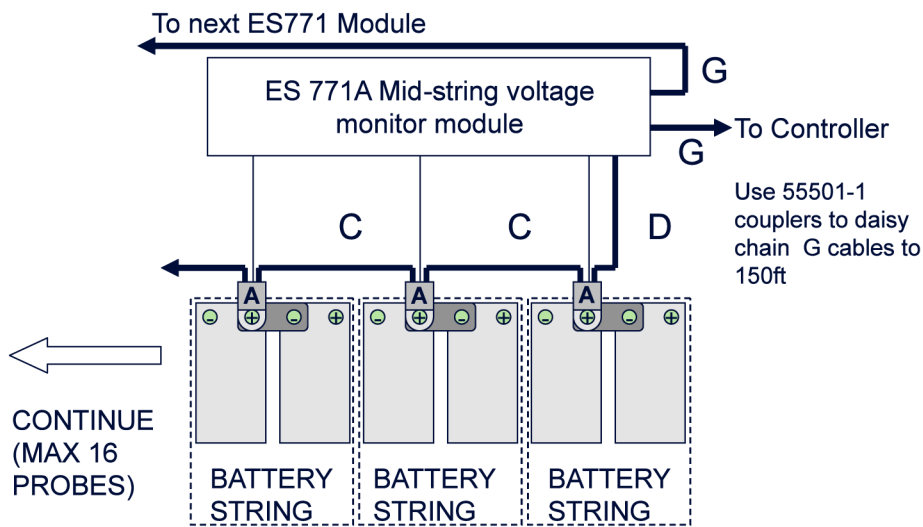

Temperature and Voltage Measurement

Shelf Specifications

Mechanical	
Height (in. /mm)	10.5 inches / 266mm
Width (in. /mm)	23 inches / 584mm
Depth (in. /mm)	20.2 inches / 514mm
Weight (lb / Kg)	56lbs / 25.4kg
Safety and Standards Compliance	
NEBs	Evaluated by independent NRTL test lab to Telcordia GR63, Issue 3 and GR1089-CORE, Issue 5
Safety	CSA C22.2 No. 60950-1-03 Certified for Canada and U.S.; UL60950-1 1st Ed.
RoHS	Compliant to RoHS EU Directive 2002/95/EC RoHS 5/6
EMC	European Directive 2004/108/EC; EN55022, Class A; EN55024; FCC, Class A; GR1089-CORE, Issue 5
Agency Certifications	
CSA	CSA C22.2 No 60950-1-03 and UL 60950-1 1st Ed
EMI/EMC	European Directive 2004/108/EC; EN55022 (CISPR22) Class A; EN55024 (CISPR24)
NEBS LEVEL 3	GR1089-CORE, Issue 5

Additional Information

Product Documentation

- H5692448: Ordering Guide
 A copy of the appropriate installation manuals below ship with each system.
- CC848815325: H5692448 Installation Guide
- CC848815341: Advanced Features User Guide for the Pulsar Plus Controller, 167-792-183

Notes:

Dotted lines for notes.

Notes:

Notes section with horizontal dotted lines for writing.

Management Visibility

Galaxy Manager™ software is the centralized visibility and control component of a comprehensive power management system designed to meet engineering, operations and maintenance needs. The Galaxy Manager client-server architecture enables remote access to system controllers across the power network.

- Dashboard display with one-click access to management information database
- Trend analysis
- Scheduled or on demand reports
- Fault, configuration, asset, and performance management

Training

Lineage Power offers on-site and classroom training options based on certification curriculum. Technical training can be tailored to individual customer needs. Training enables customers and partners to more effectively manage and support the power infrastructure. We have built our training program on practical learning objectives that are relevant to specific technologies or infrastructure design objectives.

Service & Support

Lineage Power field service and support personnel are trusted advisors to our customers – always available to answer questions and help with any project, large or small. Our certified professional services team consists of experts in every aspect of power conversion with the resources and experience to handle large turnkey projects along with custom approaches to complex challenges. Proven systems engineering and installation best practices are designed to safely deliver results that exceed our customers' expectations.

Warranty

Lineage Power is committed to providing quality products and solutions. We have developed a comprehensive warranty that protects you and provides a simple way to get your products repaired or replaced as soon as possible.

The Lineage Power Infinity B comes with a 2 year hardware warranty. For full warranty terms and conditions please go to www.lineagepower.com/warranty.

Contact Us

For more information, call Lineage Power toll free at **877-LINEAGE (877-546-3243)**, or +1 972 244 9288 and visit us on the Web at lineagepower.com

Lineage Power reserves the right to change specifications without notice. Please contact your Lineage representative to confirm current specifications. Please visit www.lineagepower.com/patents for patents and trademark information.